




ADJUSTABLE PEDESTALS

MAX SERIES

- Base slope corrector that eliminates tilt of the pedestals on substrates with a slope (0-6%).
- Load resistance up to 1700 kg on each center loaded pedestal.
- Only 3 pedestals heights to reach basic height adjustment between 45 - 350 mm.
- Reach height 950 mm with 3 height couplers only (it is possible use higher with several conditions).
- Self leveling head automatically adjust to slope.
- Fast installation with unique driller bit tool.
- Manual adjustment for precise height regulation.
- Key from the top to adjust height with paver laid on the pedestals.
- Select 3 mm or 5 mm tab size for pavers.
- Select joist adapter for decking.
- Easily brace high pedestals with metal wire.
- Additional accessories as: Rubber shim, Up to wall perimeter clip, Vertical closure clip, Rubber SBR pads, Windproof system, Driller bit tool, key from the top.
- Made in EU.

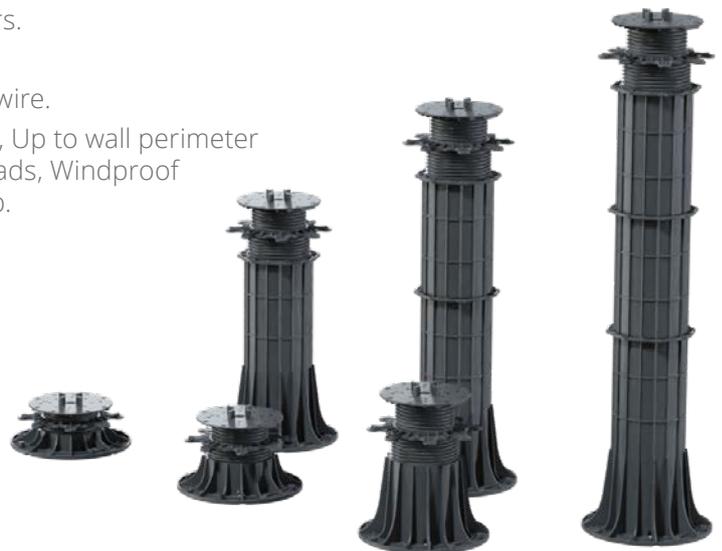

Copyright 2022 DD GROUP. All rights reserved.

MAX SERIES

	Model No.	Description	Range	Notes
Pedestals	 MAX 045-075	Adjustable Pedestal	45 - 75 mm	Smooth height adjustment.
	 MAX 075-150	Adjustable Pedestal	75 - 150 mm	Smooth height adjustment.
	 MAX 150-350	Adjustable Pedestal	150 - 350 mm	Smooth height adjustment.
	 DS200	Height coupler	200 mm	Insert DS200 into MAX 150-350 base or another DS200 to reach up to 950 mm.
Tabs	 D3 D5	Gap spacer disc	-	Select 3 mm or 5 mm paver gap spacer.
	 L3 L5	Gap spacer	-	Select 3 mm or 5 mm paver gap spacer.
	 AD	Joist adapter	-	For decking joist fixing with pedestals.

		SH145	Rubber shim SH145	Adds 1,5 mm in height	Noise cancellation and tile thickness compensation.
		LE MAX	Self leveling head LE MAX 0-6%	Adds 20 mm in height	Self leveling of the terrace with a slope range from 0% to 6%.
		SC	Base slope corrector 0-8%	Adds 30,5 mm in height	Base slope corrector helps to compensate slope of the terrace and makes pedestal stay vertical even if staying on uneven sloped surface.
		DDPWAP	Up to wall clip	Adds 2,5 mm in height	Use to create a gap between perimeter tile and wall. Prevent tiles displacement and makes a spare space for tiles thermal expansion.
Accessories		DDP CP	Side finishing closure plate	Adds 3,5 mm in height	It is used to make vertical masking of the ventilated terrace. Two pieces increase the height of the bracket by 7 mm.
		SBR 220/3	SBR rubber pad	Adds 3 mm in height	Placed under the pedestal gives additional protection of the water membrane. Also gives additional noise cancellation.
		WP	Windproof system	-	System that helps to mechanically fix tiles to the pedestal in case of a high wind exposure. Using that system needs to cut a kerf on the tiles corner edges.
		PPK	Drill driver bit tool	-	Helps with fast height adjustment of the pedestals.
		MPK	Key from the top	-	Helps to make small adjustments after tiles installation. WARNING! Use only with self leveling head.

Copyright 2022 DD GROUP. All rights reserved.



IMPORTANT: Refer to DD PEDESTALS product specifications to ensure proper use and installation. Find specifications at www.ddgro.eu