

TECHNICAL DATA SHEET

DDP 008

Rubber paver spacer 8 mm (5/16")

BASIC INFORMATION

Product name	Rubber paver spacer 8 mm (5/16")
Trade name	DDP 008
Product group	Support pads
Application	Terrace with tiles
Code	Tile gap 3 mm (1/8") - 10018 Tile gap 5 mm (3/16") - 10561



FEATURES

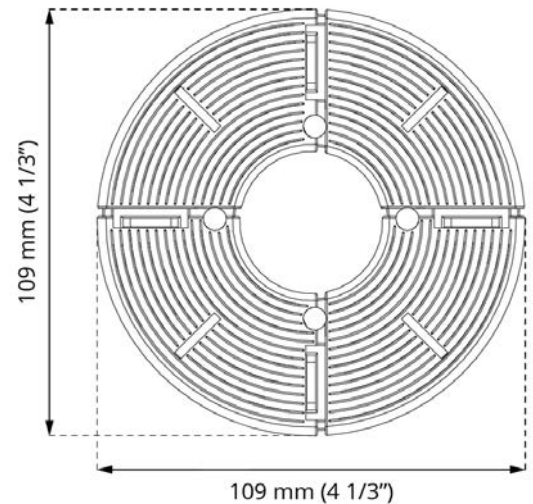
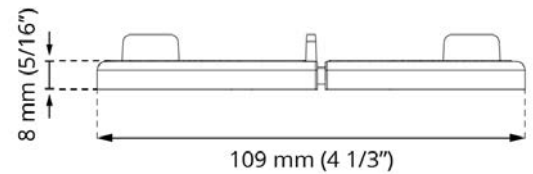
- Made of flexible material.
- Can be divided into parts.
- Possibility of stacking.
- Built-in 3 mm (1/8") spacer gap.
- Provides acoustic comfort.

DESCRIPTION

Rubber pads for tiles/pavers with a constant height of 8 mm (5/16"), designed for use on terraces, roofs, and insulation. They are made of flexible material, which has a positive effect on the acoustics of the terrace. It is possible to stack up to three pads on top of each other, allowing for heights of 16 and 24 mm (5/8" and 17/18"). They have 3 mm (1/8") built-in spacer which creates gap between the tiles. There is also the possibility of installing an additional 5 mm (3/16") spacer (L5). It is also possible to add 1.5 mm (1/16") leveling rubber pads (SH100) on top of the pedestals. Terraces laid on pedestals allow for easy inspection of the insulation under the tiles.

PARAMETERS

Height	8 mm (5/16")
Stacking heights	Stacking: 2 pcs. - 16 mm (5/8") 3 pcs. - 24 mm (17/18")
Diameter	Ø 109 mm (93,3 cm ²) Ø 4 1/3" (14,46 in ²)
Width of the built-in tile gap	3 mm (1/8")
Weight	0,052 kg 0.115 lbs
Load resistance	up to 2500 kg up to 5500 lbs
Operating temperature	-20°C; +65°C -4°F; +149°F
Color	Black
Material	Rubber



APPLICATION

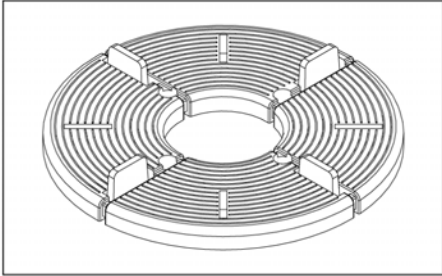
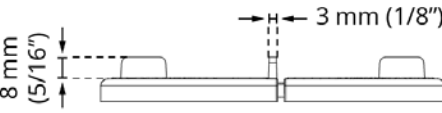
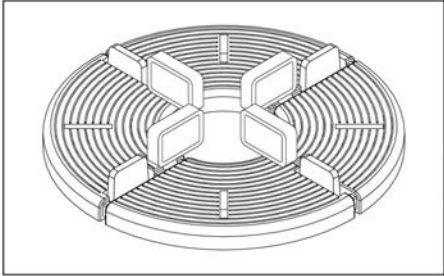
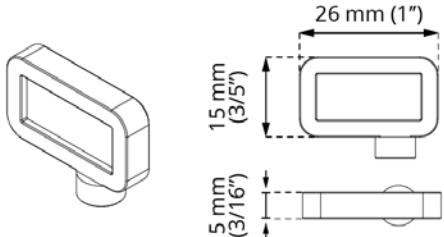
- Terrace with tiles.

CERTIFICATION

Up to date certificates and test reports available on demand:

1. Characteristic pedestal vertical load test.
2. Decrease of pedestal load bearing induced by laboratory UV light source exposure.
3. Decrease of pedestal load bearing capacity induced by thermal shock.
4. Decrease of pedestal load bearing capacity induced by salt water impact.
5. Decrease of pedestal load bearing capacity induced by temperature decrease -20°C / -4°F (24h).
6. Decrease of pedestal load bearing capacity induced by temperature increase to 65°C / +149°F (24h).
7. Characteristic value of deformation increase per unit of force induced by creep during 1000 hour test.
8. Reaction to fire classification, class.

TILE GAP

Basic	With a gap spacer 5 mm (3/16")
<p>DDP 008 - built-in gap spacer 3 mm (1/8")</p>  	<p>DDP 008 with gap spacer 5 mm (3/16") (L5)</p>  

USAGE

Designed for use with tiles/pavers, they allow laying stable and even surface, stabilize corners and gaps between tiles. They provide acoustic comfort through the material they are made of. The supports can be easily trimmed due to their modular construction - for convenience, lines are marked on the support that easily indicate the sections to be trimmed.

DATA LOGISTICS

Product	Type	Size	Quantity	Weight brutto
DDP 008	Carton box	60 x 50 x 20 cm (23 2/3" x 19 2/3" x 7 7/8")	200 pcs.	12 kg (26.46 lbs)
	Pallet	120 x 100 x 220 cm (47 1/4" x 39 1/2" x 86")	8000 pcs.	449 kg (989.88 lbs)

ADDITIONAL ACCESSORIES

Gap spacer 5 mm (3/16") **L5**, SBR rubber pad **SBR100/3**, SBR rubber pad **SBR100/8**, Rubber shim **SH100**.

EXAMPLE OF APPLICATION

