

TECHNICAL DATA SHEET

DDP 010

Paver spacer 10 mm (6/16")

BASIC INFORMATION

Product name	Paver spacer 10 mm (6/16")
Trade name	DDP 010
Product group	Support pads
Application	Terrace with tiles
Code	Tile gap 3 mm (1/8") - 10019 Tile gap 5 mm (3/16") - 10564



FEATURES

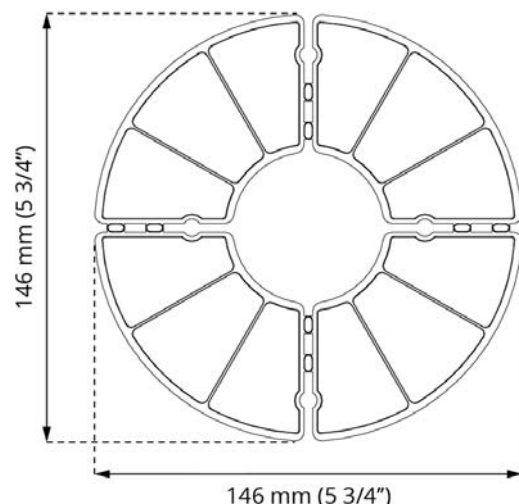
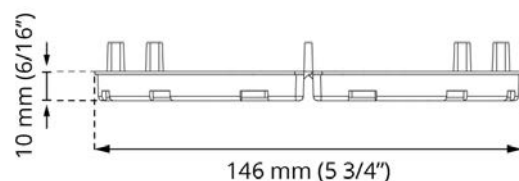
- Height 10 mm (6/16").
- Modular construction - possibility of dividing into parts.
- Built-in spacer gap 3 mm (1/8").
- Used with tiles/pavers.
- Possibility of stacking pedestals.

DESCRIPTION

Fixed-height pedestals for laying on terraces, roofs, and insulation. DDP 010 and DDP 015 pedestals can be stacked, meaning they can be laid on top of each other, up to three pieces, allowing for heights of 20, 25, 30, 35, 40 or 45 mm (3/4", 1", 1 1/5", 1 3/8", 1 4/7" or 1 3/4"). The built-in spacers have a width of 3 mm (1/8"), but there is the possibility of installing additional spacers with a width of 5 mm (3/16"). Rubber pads with a thickness of 1.5 mm (1/16") (SH145) can also be placed on the pedestals, which level out any unevenness in the thickness of the tiles/pavers. Terraces laid on pedestals allow for easy inspection of the insulation under the tiles.

PARAMETERS

Height	10 mm (6/16")
Stacking heights	Stacking: 2 pcs. - 20 mm (3/4") 3 pcs. - 30 mm (1 1/5") Stacking with DDP 0015: 25, 35, 40 mm (1", 1 3/8", 1 4/7")
Diameter	Ø 146 mm (167,4 cm ²) Ø 5 3/4" mm (25,95 in ²)
Width of the built-in tile gap	3 mm (1/8")
Weight	0,034 kg 0.075 lbs
Load resistance	up to 2500 kg up to 5500 lbs
Operating temperature	-20°C; +65°C -4°F; +149°F
Color	Black
Material	Certified plastic PP



APPLICATION

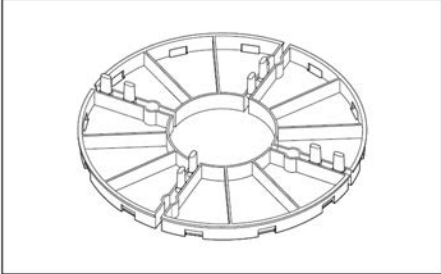
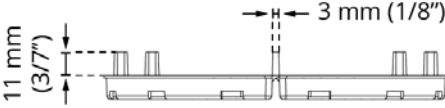
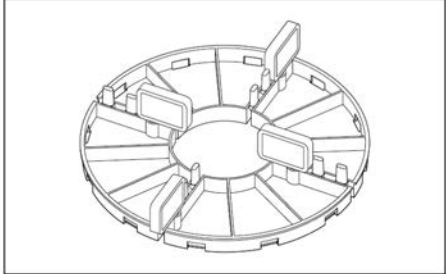
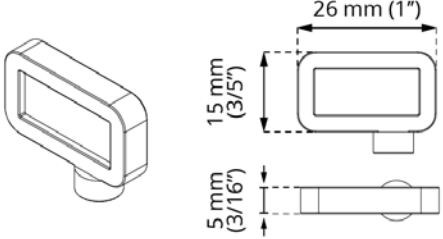
- Terrace with tiles.

CERTIFICATION

Up to date certificates and test reports available on demand:

1. Characteristic pedestal vertical load test.
2. Decrease of pedestal load bearing induced by laboratory UV light source exposure.
3. Decrease of pedestal load bearing capacity induced by thermal shock.
4. Decrease of pedestal load bearing capacity induced by salt water impact.
5. Decrease of pedestal load bearing capacity induced by temperature decrease -20°C / -4°F (24h).
6. Decrease of pedestal load bearing capacity induced by temperature increase to 65°C / +149°F (24h).
7. Characteristic value of deformation increase per unit of force induced by creep during 1000 hour test.
8. Reaction to fire classification, class.

TILE GAP

Basic	With a gap spacer 5 mm (3/16")
<p data-bbox="204 349 667 383">DDP 010 - built-in gap spacer 3 mm (1/8")</p>  	<p data-bbox="916 349 1394 383">DDP 010 with gap spacer 5 mm (3/16") (L5)</p>  

USAGE

Designed for use with tiles/pavers, they allow laying stable and even surface, stabilize corners and gaps between tiles. They provide acoustic comfort through the material they are made of. The supports can be easily trimmed due to their modular construction - for convenience, lines are marked on the support that easily indicate the sections to be trimmed.

DATA LOGISTICS

Product	Type	Size	Quantity	Weight brutto
DDP 010	Carton box	60 x 50 x 40 cm (23 2/3" x 19 2/3" x 15 3/4")	400 pcs.	16,7 kg (36.82 lbs)
	Pallet	120 x 100 x 220 cm (47 1/4" x 39 1/2" x 86")	8 000 pcs.	354 kg (780.44 lbs)

ADDITIONAL ACCESSORIES

Gap spacer 5 mm (3/16") **L5**, SBR rubber pad **SBR200/3**, SBR rubber pad **SBR200/8**, Rubber shim **SH145**.

EXAMPLE OF APPLICATION

