

TECHNICAL DATA SHEET

DDP 016

Paver spacer 16 mm (5/8")

BASIC INFORMATION

Product name	Paver spacer 16 mm (5/8")
Trade name	DDP 016
Product group	Support pads
Application	Terrace with tiles
Code	Tile gap 3 mm (1/8") - 10021 Tile gap 5 mm (3/16") - 10568



FEATURES

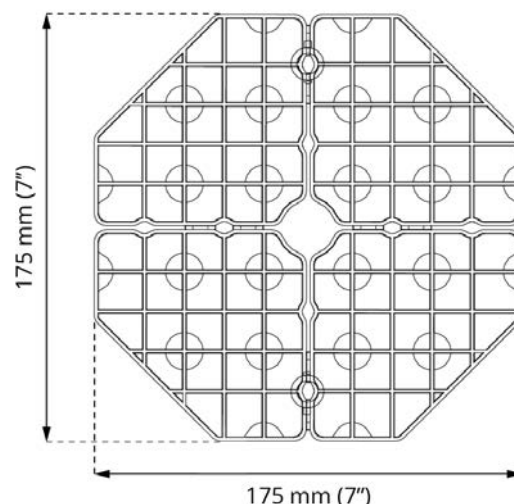
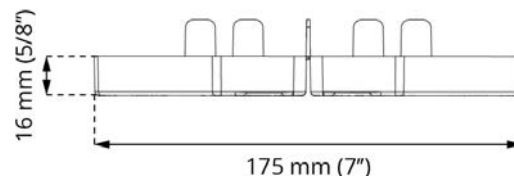
- Height 16 mm (5/8").
- Modular construction - possibility of dividing into parts.
- Built-in spacer gap 3 mm (1/8").
- Used with tiles/pavers.
- Possibility of stacking pedestals.

DESCRIPTION

Fixed-height pedestals for laying on terraces, roofs, and insulation. DDP016 pedestals can be stacked, meaning they can be laid on top of each other, up to three pieces, allowing for a height of 32 or 48 mm (1 1/4" or 1 8/9"). The built-in spacers have a width of 3 mm (1/8"), but there is the possibility of installing additional spacers with a width of 5 EN mm (3/16"). Rubber pads with a thickness of 1.5 mm (1/16") (SH175) can also be placed on the pedestals to level out any unevenness in the tiles/pavers. Terraces laid on pedestals allow for easy inspection of the insulation under the tiles.

PARAMETERS

Height	16 mm (5/8")
Stacking heights	Stacking: 2 pcs. - 32 mm (1 1/4") 3 pcs. - 48 mm (1 8/9")
Diameter	Ø 175 mm (240,5 cm ²) Ø 7" (37,28 in ²)
Width of the built-in tile gap	3 mm (1/8")
Weight	0,144 kg 0.317 lbs
Load resistance	up to 2500 kg up to 5500 lbs
Operating temperature	-20°C; +65°C -4°F; +149°F
Color	Black
Material	Certified plastic PP



APPLICATION

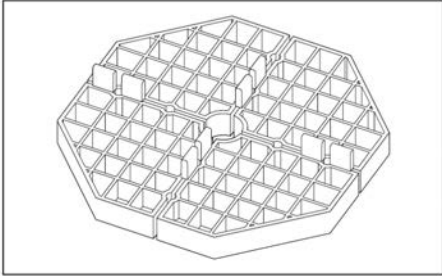
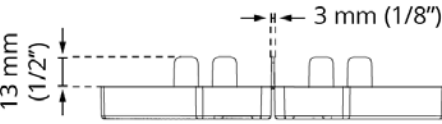
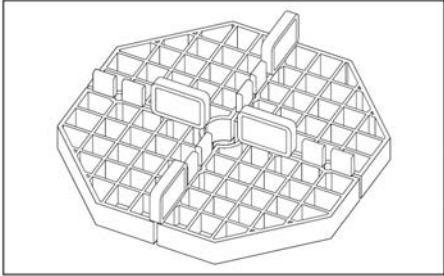
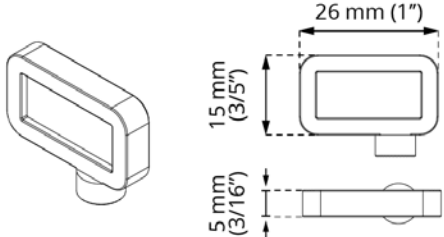
- Terrace with tiles.

CERTIFICATION

Up to date certificates and test reports available on demand:

1. Characteristic pedestal vertical load test.
2. Decrease of pedestal load bearing induced by laboratory UV light source exposure.
3. Decrease of pedestal load bearing capacity induced by thermal shock.
4. Decrease of pedestal load bearing capacity induced by salt water impact.
5. Decrease of pedestal load bearing capacity induced by temperature decrease -20°C / -4°F (24h).
6. Decrease of pedestal load bearing capacity induced by temperature increase to 65°C / +149°F (24h).
7. Characteristic value of deformation increase per unit of force induced by creep during 1000 hour test.
8. Reaction to fire classification, class.

TILE GAP

Basic	With a gap spacer 5 mm (3/16")
<p>DDP 016 - built-in gap spacer 3 mm (1/8")</p>  	<p>DDP 016 with gap spacer 5 mm (L5) (3/16") (L5)</p>  

USAGE

Designed for use with tiles/pavers, they allow laying stable and even surface, stabilize corners and gaps between tiles. They provide acoustic comfort through the material they are made of. The supports can be easily trimmed due to their modular construction - for convenience, lines are marked on the support that easily indicate the sections to be trimmed.

DATA LOGISTICS

Product	Type	Size	Quantity	Weight brutto
DDP 016	Carton box	60 x 50 x 20 cm (23 2/3" x 19 2/3" x 7 7/8")	90 pcs.	14,12 kg ()
	Pallet	120 x 100 x 220 cm (47 1/4" x 39 1/2" x 86")	3600 pcs.	584,5 kg ()

ADDITIONAL ACCESSORIES

Gap spacer 5 mm (3/16") **L5**, SBR rubber pad SBR **SBR200/3**, SBR rubber pad SBR **SBR200/8**, Rubber shim **SH175**.

EXAMPLE OF APPLICATION

